

**P** Series

#TimelessTech

# CG P72 330-335W

## MULTICRYSTALLINE SOLAR PV MODULE

### 72 Cells



- ANTI PID TECHNOLOGY
- HOT-SPOT PROTECT
- TRACEABLE QUALITY
- ANTILID TECHNOLOGY



#### 5 BUSBAR SOLAR CELL

Advanced 5 busbar Cell technology for higher efficiency and better aesthetics



#### COST EFFECTIVE

Offering high value at low cost, makes it one of the popular choices of installers and customers



#### LOWER BOS COSTS

Designed for high voltage systems of upto 1500 VDC, saving balance of system costs



#### ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behavior



#### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID and Anti PID Technology, Hot-Spot Protect and Traceable Quality



#### LOAD CAPACITY ENHANCEMENT

High durability raw materials helps to withstand high snow (5400 Pa) and wind loads (2400 Pa)



#### A RELIABLE INVESTMENT

12 years product warranty and 25 years linear power output warranty makes it a reliable investment

Contendre (CGPL) is one of the world's leading solar solution experts. We are specialised in high efficiency solar module manufacturing, distribution and research. To utilise our production and technology advantage, we provide our customers with comprehensive solutions for the whole life cycle of solar project.

#### THE IDEAL SOLUTION FOR:



Rooftop arrays on small residential, commercial and industrial buildings



Ground-mounted solar power plants

We use Raw Materials certified by:



Made in India

Note: Specifications subject to technical changes and tests. Contendre reserves the right of final interpretation.



CONTENDRE

Brinder Gandhi  
+91 98991 00207

Dhirendra Kumar Singh  
+91 76780 36677


Swapnil Bhonde  
+91 76780 99686



### MECHANICAL SPECIFICATION

<b>Poly Cell</b>	<b>6 x 12 (72)</b>
Format	1955 x 990 x 35 mm
Weight	<b>21 kg</b>
Front Cover	3.2 mm Tempered Glass with Anti Reflection Technology
Back Cover	Fluoro Polymer based PVDF Backsheet
Frame	More than 15 micron Anodized Aluminium
Junction Box	TUV & UL approved, IP 67 / IP 68 rated 4 Terminal Junction Box with 3 Bypass Diodes
Cable	1200mm Long, 4mm <sup>2</sup> cables
Connector	MC4 compatible connectors


### PERFORMANCE WARRANTY

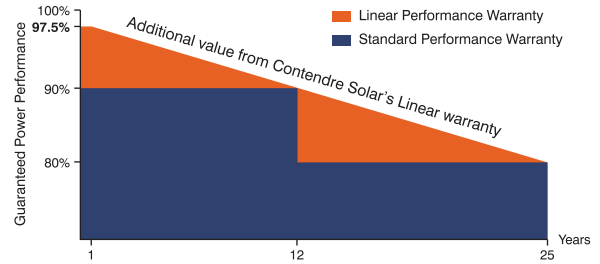

### ELECTRICAL PARAMETERS

P-SERIES		72 Cells		
		325	330	335
<b>ELECTRICAL PARAMETERS</b>				
Power at MPP	P <sub>MPP</sub> [W]	325	330	335
Short Circuit Current	I <sub>SC</sub> [A]	9.02	9.05	9.14
Open Circuit Voltage	V <sub>OC</sub> [V]	45.10	46.15	46.37
Current at MPP	I <sub>MPP</sub> [A]	8.48	8.48	8.54
Voltage at MPP	V <sub>MPP</sub> [V]	38.22	38.95	39.24
Efficiency	n [%]	16.79%	17.05%	17.31%
Fill Factor	FF	79.67	79.08	79.07
<small>Electrical values measured at STC: 25 °C, 1.5AM, 1000 W/m<sup>2</sup></small>				
<b>MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NOCT</b>				
Power at MPP	P <sub>MPP</sub> [W]	240.54	245.14	248.71
Short Circuit Current	I <sub>SC</sub> [A]	7.28	7.31	7.38
Open Circuit Voltage	V <sub>OC</sub> [V]	42.35	43.34	43.55
Current at MPP	I <sub>MPP</sub> [A]	6.72	6.72	6.77
Voltage at MPP	V <sub>MPP</sub> [V]	35.89	36.58	36.85
<small>Measurement tolerance, AM 1.5G, NOCT (Wp) at 45 ± 2 °C @800 W/m<sup>2</sup></small>				

### CONTENDRE MODULE DIMENSION DIAGRAM

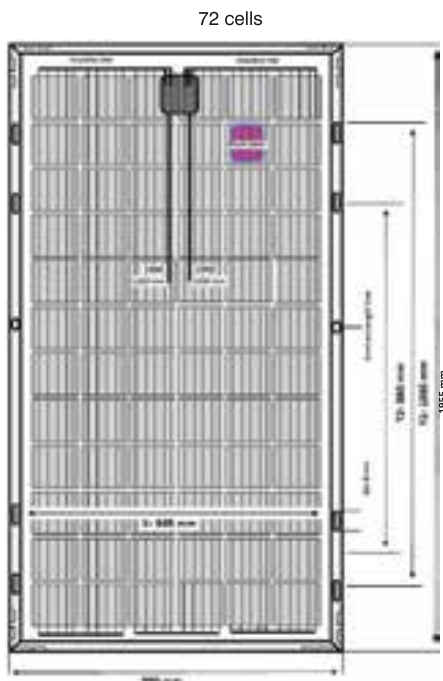

### TEMPERATURE COEFFICIENTS

Temperature Coefficient of I <sub>SC</sub>	a	[%/C]	+0.0451
Temperature Coefficient of P <sub>MAX</sub>	y	[%/C]	-0.3614
Temperature Coefficient of V <sub>OC</sub>	b	[%/C]	-0.3045
Normal Module Operating Temperature	NMCT	[°C]	45 ± 2 °C

### PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage V <sub>sys</sub>	[v]	1500 (IEC)
Maximum Series Fuse Rating	[A DC]	20
Max. Design Load, Push / Pull	[lbs / ft <sup>2</sup> ]	2400 Pa
Max. Test Load, Push / Pull	[lbs / ft <sup>2</sup> ]	5400 Pa
Safety Class		II
Fire Rating		C
Temperature Degree Celsius		-40°C up to +85°C

### PACKAGING DETAILS

Number of Modules per Pallet	30
Number of Pallets per 40' HC-Container	20
Number of Modules per 40' HC-Container	600
1-Pallet Weight	640.00 kg

### QUALIFICATION AND CERTIFICATES

UL 1703, CE-compliant.  
IEC 61215:2016, IEC 61730:2016, Application Class II.  
ISO 9001:2015, ISO 14001:2015, ISO 45001:2018.



**Note:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Specifications subject to technical changes. Please confirm your exact requirement with the company representative while placing your order ©CONTENDRE

CONTENDRE GREENENERGY PVT. LTD.

TEL: +91-9136457555 EMAIL: info@contendresolar.com WEB: www.contendresolar.com

Made in India



**CONTENDRE**  
SOLAR