

HELOCTM PRO

GS10-M144-WF
(530 Wp - 560 Wp)



High Saving

Lower LCOE, reduced BOS cost,
shorter payback time



High Efficiency

Excellent module conversion
efficiency of up to 21.70%



Low-light Performance

Advanced glass and cell surface textured design
ensure excellent performance in low-light environment



PID Resistance

Excellent Anti-PID Performance guarantee
limited power degradation for mass production



IP68 Junction Box

High waterproof level




INDUSTRY LEADING PROTECTION



12 Years Warranty For
Materials And Processing



25 Years Warranty For
Linear Power Output

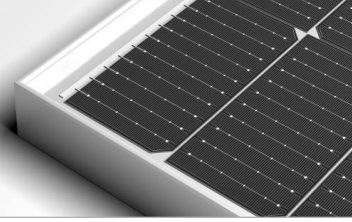

TECHNICAL DATA

Electrical Parameter at STC	Monocrystalline Module						
Module Type	GS10-M144-WF						
Capacity rating – Pmax(Wp)	530	535	540	545	550	555	560
Power Tolerance (%)	0-2	0-2	0-2	0-2	0-2	0-2	0-2
Module efficiency (%)	20.53	20.73	20.92	21.12	21.31	21.50	21.70
Rated voltage - Vmp(V)	41.39	41.60	41.81	42.02	42.23	42.44	42.68
Rated current - Imp(A)	12.82	12.86	12.92	12.97	13.02	13.07	13.12
Open circuit voltage - Voc(V)	49.15	49.48	49.81	50.14	50.47	50.80	51.13
Short circuit current - Isc(A)	13.43	13.47	13.51	13.55	13.59	13.63	13.67

Under Standard Test Conditions (STC) of irradiance 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Except Pmax, all other parameters have a tolerance of ±3%.

PERMISSIBLE OPERATING CONDITIONS

Temperature range	-40°C to +85°C
Maximum system voltage	1500 VDC
NOCT	45± 2°C
Hail resistance	Max. diameter of 25 mm with velocity 23 m/s


TEMPERATURE COEFFICIENTS (TC)

Temperature Coefficient (Voc)	-0.28% /°C
Temperature Coefficient (Isc)	0.048% /°C
Temperature Coefficient (Pmax)	-0.35% /°C


PACKAGING CONFIGURATION

Number of Modules per Pallet	30
No of pallet	20
No of module, 40ft HC container	600


IV CURVE



PV CURVE

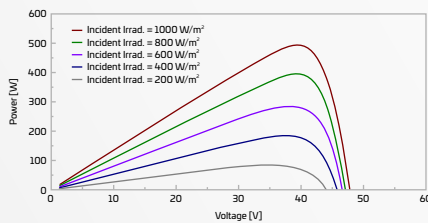


LINEAR GRAPH

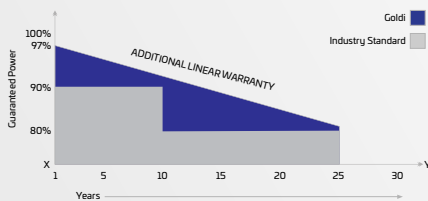

MECHANICAL SPECIFICATION

Solar cells	144 pcs monocrystalline Silicon (PERC), Multi BB
Encapsulation	Ultra - clear PID free EVA (Ethylene-Vinyl-Acetate)
Backside	UV protected reflective backsheet
Frame	Silver Anodized Aluminium Alloy
Solar Glass	3.2 mm, High Transmission, AR Coated Tempered Glass
Dimensions	(L) 2279 mm x (W) 1133 mm x (H) 35 mm
Weight	~28 Kg
J-box	IP 68 certified, 3 diodes, Split junction box
Series Fuse Rating	25 A
Cable	Solar cable 400 mm length, 4 mm ²
Connectors	MC4 compatible connectors
Application Class	Class A
Electrical Safety	Class II
Fire Safety	Class C (Type 1)
Surface load	Snow load 5400 Pa, Wind load 2400 Pa

DRAWING (MEASUREMENTS ARE IN MM)

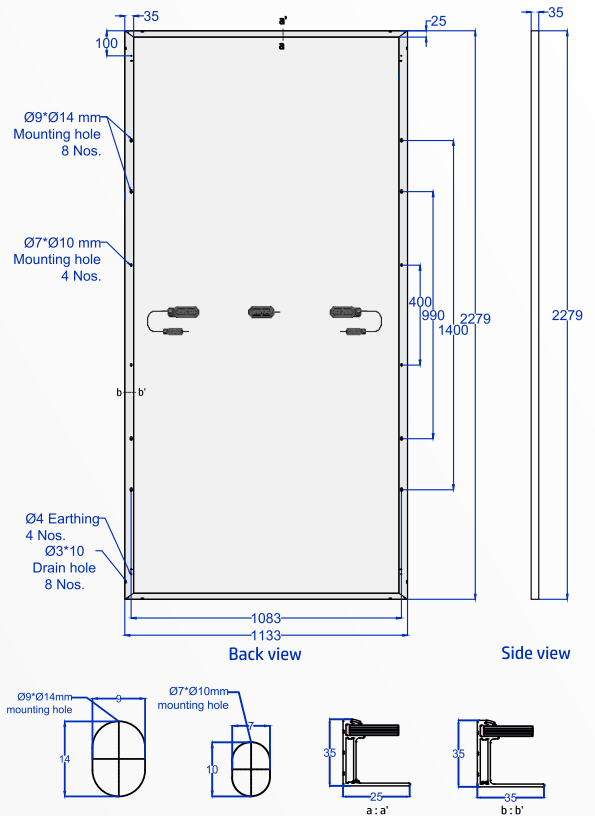

PRODUCT CERTIFICATIONS

*We have applied for below certifications:

IEC 61215: 2016, IEC 61730: 2016, IS 14286:2010/IEC 61215:2005,

IS/IEC 61730-1 & 2: 2004

UL 61730-1 & 2, IEC 61701, IEC 62716, IEC 62804, IEC 60068-2-68, IEC 62759-1, CEC

MANAGEMENT SYSTEM CERTIFICATIONS



Certificate Number 18976

UTILITY | INDUSTRIAL | AGRICULTURE | RESIDENTIAL

- For handling & installation instructions, refer to Goldi Solar's installation manual available on the company website
- Before placing an order, confirm your requirements with our sales representative
- The electrical data provided here is for reference purposes only
- Dispose of a product as e-waste after the end of its working life
- Refer to Goldi Solar's warranty document for terms and conditions
- Due to constant product modifications, Goldi Solar reserves the right to amend the above specifications without prior notice
- Images in the datasheet are for representation purpose only

1800 833 5511

info@goldisolar.com

goldisolar.com